

# ProBaker





## Smart & Simple: Easy-to-Use Control Panels

### S+ Series Programmable Digital Control



Programmable Digital Control with 2.4" Screen - MO CookBook: 100 Programs with 4 Steps Per Program - Preheating Function - MO AutoClean - 6 Chefs Favourites Keys - Boilerless Steam Control - MO ThermaTech - Double Hinged Glass Door - MO RapidDry

### M+ Series Electromechanical Control



Electromechanical Control with Steam Regulator - Temperature Range: 50°C - 270°C - 120 Minute Timer - Boilerless Steam Control - MO ThermaTech - Double Hinged Glass Door - MO RapidDry - 2 Speed Fans



# ProBaker

## Baking Uniformity Optimized

Elevate your baking experience with our ProBaker convection-steam ovens. Seamlessly integrating cutting-edge technology, these ovens offer unparalleled convenience and precision, making them perfect for heavy working loads. Control and monitor your baking from anywhere, while intelligent features adapt to your preferences, ensuring consistently perfect results. A refined, streamlined design that embodies elegance and sophistication. Experience the future of baking where innovation meets excellence.



CAKES




PUFF PASTRY



BREAD



BISCUITS / COOKIES

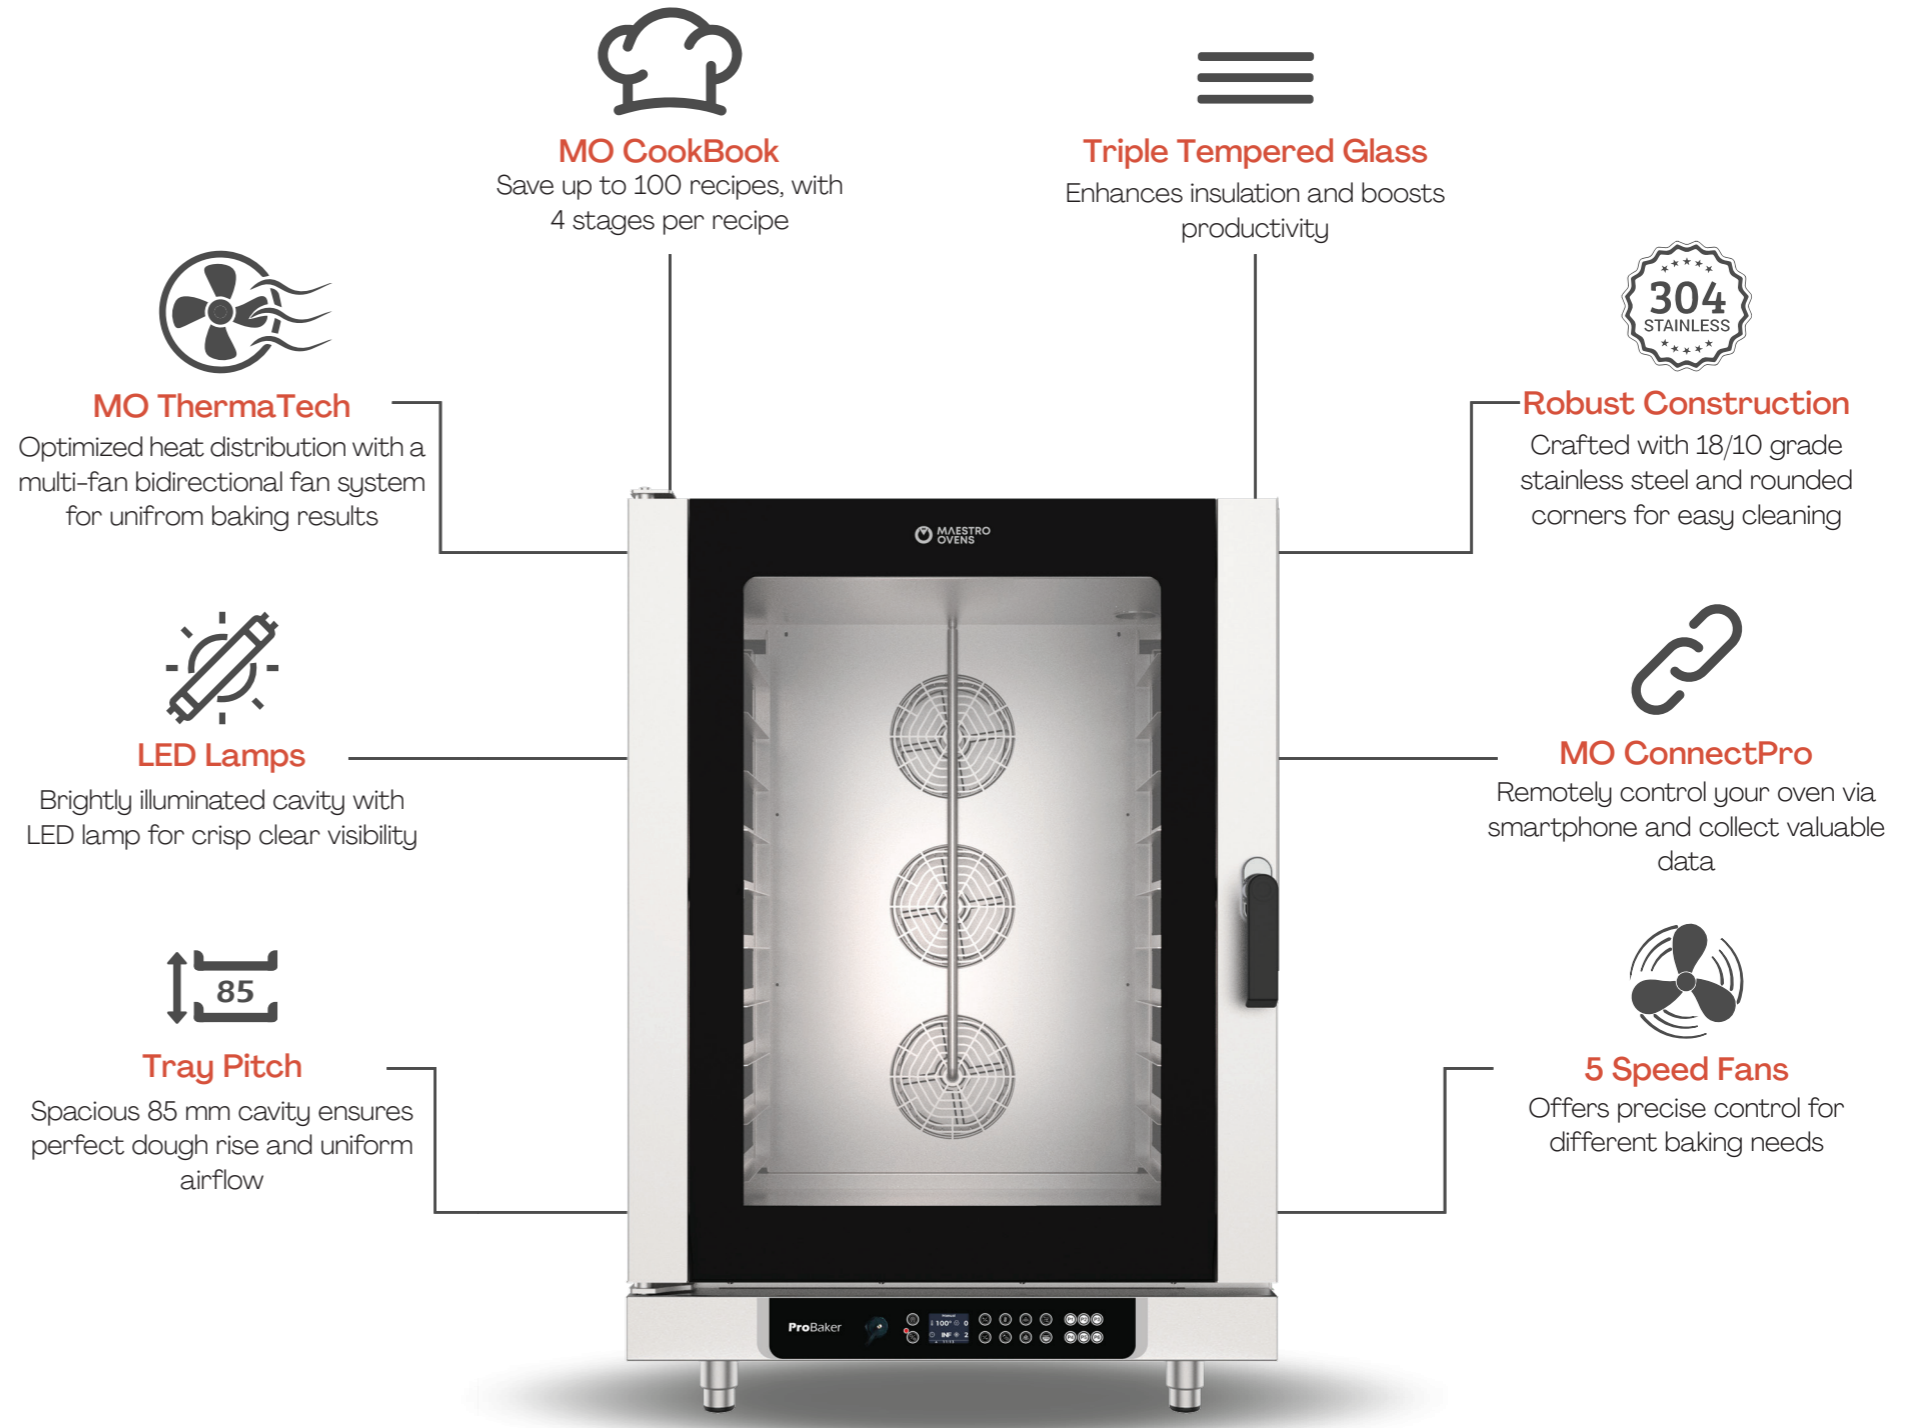

**S+ Series** Programmable Digital Control



**M Series** Electromechanical Control



Choosing the right oven for your needs is important. See the back page to discover which oven has the features that are the best match for your kitchen



## Powerful. Efficient. Precise.

**S+ Series** - Programmable Digital Control with 2.4" Screen - 5 Speed Fans - MO RapidDry  
100 programs with 4 steps per program, 6 Chefs Favorites, Temperature 30-270°C,  
Automatic Pre-Heating, Automatic and Continuous Steam Regulation

450 x 330 mm  
GN 2/3



Model  
KVE-0343-STT

Capacity	3 Trays
Pitch	100 mm
Frequency	50/60 Hz
Voltage	220 - 240V/1PH
Power Output	3.4 kW
Dimensions (WxDxH)	650x680x575 mm
Temperature Range	30 - 270 °C
Weight	40 kg

600 x 400 mm



Model  
KVE-0364-STT

Capacity	3 Trays
Pitch	100 mm
Frequency	50/60 Hz
Voltage	220 - 240V/1PH
Power Output	3.4 kW
Dimensions (WxDxH)	800x730x575 mm
Temperature Range	30 - 270 °C
Weight	65 kg



Model  
KVE-0364-SDT

## Powerful. Efficient. Precise.

**S+ Series** - Programmable Digital Control with 2.4" Screen - 5 Speed Fans - MO RapidDry  
100 programs with 4 steps per program, 6 Chefs Favorites, Temperature 30-270°C,  
Automatic Pre-Heating, Automatic and Continuous Steam Regulation

600 x 400 mm



Model  
KVE-0464-STR

Capacity	4 Trays	4 Trays	6 Trays	6 Trays	10 Trays	10 Trays	16 Trays
Pitch	85 mm	85 mm	85 mm	85 mm	85 mm	85 mm	85 mm
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Voltage	380 - 400V/3Ph	220 - 240V/1Ph	380 - 400V/3Ph	220 - 240V/1Ph	380 - 400V/3Ph	220 - 240V/1Ph	380 - 400V/3Ph
Power Output	11.2 kW	0.4 kW	11.2 kW	0.4 kW	16.8 kW	0.6 kW	36 kW
Dimensions (WxDxH)	865x815x870 mm	865x815x870 mm	865x815x1045 mm	865x815x1045 mm	865x815x1350 mm	865x815x1350 mm	980x815x1720 mm
Temperature Range	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C
Weight	90 kg	105 kg	125 kg	140 kg	180 kg	180 kg	260 kg



Model  
KVG-0464-STR



Model  
KVE-0664-STR



Model  
KVG-0664-STR



Model  
KVE-1064-STR



Model  
KVG-1064-STR



Model  
KVE-1664-STR

**M+ Series** - Electromechanical Control  
Temperature 50-270 °C / Timer 120 min./ Steam Regulator/ 2 Speed Fans/ MO RapidDry

450 x 330 mm  
GN 2/3



Model  
KVE-0343-MTT

Capacity	3 Trays
Pitch	100 mm
Frequency	50/60 Hz
Voltage	220 - 240V/1PH
Power Output	3.4 kW
Dimensions (WxDxH)	650x680x575 mm
Temperature Range	50 - 270 °C
Weight	40 kg

600 x 400 mm



Model  
KVE-0364-MTT

Capacity	3 Trays
Pitch	100 mm
Frequency	50/60 Hz
Voltage	220 - 240V/1PH
Power Output	3.4 kW
Dimensions (WxDxH)	800x730x575 mm
Temperature Range	50 - 270 °C
Weight	65 kg



Model  
KVE-0364-MDT

**M+ Series** - Electromechanical Control  
Temperature 50-270 °C/ Timer 120 min./ Steam Regulator/ 2 Speed Fans/ MO RapidDry

600 x 400 mm



Model  
KVE-0464-MTR

Capacity	4 Trays	4 Trays	6 Trays	6 Trays	10 Trays	10 Trays	16 Trays
Pitch	85mm	85 mm	85 mm	85 mm	85 mm	85 mm	85 mm
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Voltage	380 - 400V/3Ph	220 - 240V/1Ph	380 - 400V/3Ph	220 - 240V/1Ph	380 - 400V/3Ph	220 - 240V/1Ph	380 - 400V/3Ph
Power Output	11.2 kW	0.4 kW	11.2 kW	0.4 kW	16.8 kW	0.6 kW	36 kW
Dimensions (WxDxH)	865x815x870 mm	865x815x870 mm	865x815x1045 mm	865x815x1045 mm	865x815x1350 mm	865x815x1350 mm	980x815x1720 mm
Temperature Range	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C	30 - 270 °C
Weight	90 kg	105 kg	125 kg	140 kg	180 kg	180 kg	260 kg



Model  
KVG-0464-MTR



Model  
KVE-0664-MTR



Model  
KVG-0664-MTR



Model  
KVE-1064-MTR



Model  
KVG-1064-MTR



Model  
KVE-1664-MTR